

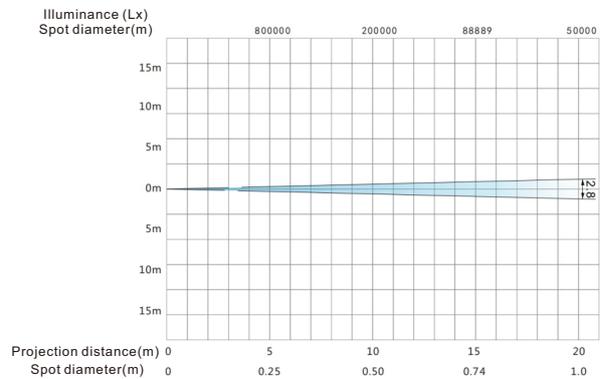





Moving Head Beam Light

TL-SL111



Feature:

- * Optics: the lenses with high temperature resistance and strong transmittance (6-layers coating film), multi-level optical lens group electronic focusing, and linear magnification function.
- * Dimming: 0-100% linear adjustment.
- * Color panel: 13 color plate + 1 white light, bidirectional rainbow effect, adjustable speed, and arbitrary positioning function.
- * Fixed pattern panel: 13 fixed pattern plate + 1 white light, pattern dithering, one-way flow effect, adjustable speed, and arbitrary positioning function.
- * Rotating pattern panel: 9 rotating pattern plate + 1 white light, each pattern supports rotating in both directions, dithering and water flow effects.
- * Prism: one 8-sided rotating prism + one row lens, the prism can be rotated in both directions, and the speed is adjustable.
- * Strobe: double-chip stroboscopic 0.5-14 times/sec, support synchronous, asynchronous, random stroboscopic mode, and adjustable speed.
- * Atomization: 1 independent atomization effect with soft and natural light spot.
- * Scan range: X-axis 540°/2.5 S, Y-axis 270°/1.5 S; resolution: 8Bit/16Bit.
- * Display interface: a 2.8-inch widescreen LCD interface in Chinese and English.
- * Intelligent heat dissipation: adopt wind direction drainage and intelligent temperature monitoring technology; according to the temperature of different parts of the light, the cooling fans in different parts are automatically started to cool the light components down.

Specifications:

Model	TL-SL111
Input voltage	AC110V-240V 50/60Hz, 470W
Ballast	Electronic ballast
Light source	Philips 280
Average lifespan	2000H
Color temperature	8500K
Beam angle	Zoom /2.5°-10° Spot/5° -20° Wash/ 2.8-38°
Control mode	DMX512 (ART-NET/RDM/DMX wireless, optional)
Channel	16/23 channels
Fixture material	High temperature resistant plastic + molded alloy material
Protection level	IP30
Fixture size (L×W×H)	371×289×574mm
Package size (L×W×H)	470×385×695mm
Gross weight	22.5kg
Net weight	18.8kg