



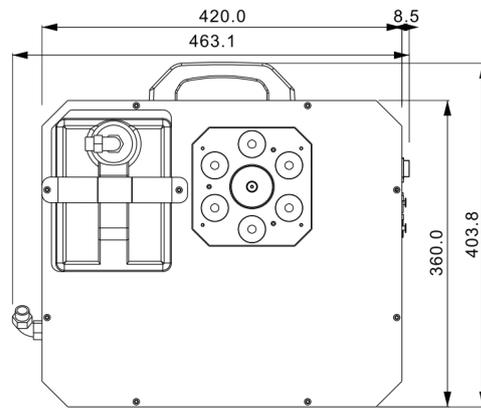

# Stage Effect Fogger

## TL-SL602

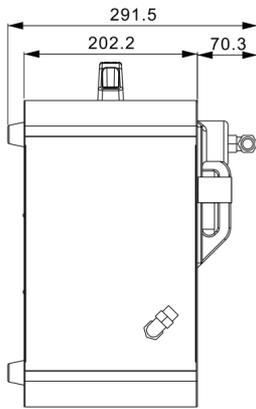

### Feature:

- \* Color mixing: RGBWAP stepless color mixing.
- \* Maximum fog output: about 32,000 cubic feet per minute.
- \* Maximum spray distance: about 4-6 m.
- \* Maximum fog liquid consumption: about 7 min/L.
- \* Maximum continuous output time (100 output): about 30 seconds.
- \* Output time with full load of consumables (100 output): about 25 minutes.

### Specifications:

Model	TL-SL602
Input voltage	AC 110-240V 50/60Hz, 1500W
Fuse	10A/250V
Working current	6.5 A
LED color	RGBWAP
Power of a lamp bead	10 W
Number of lamp bead	6 pieces
Preheating time	About 4.0 minutes
Heater (heating aluminum/speed heater)	Heating aluminum
Fog liquid drum	4.0 L
Control mode	DMX512 control, remote control
Channel	7/11CH
Protection level	IP20
Product size (L×W×H)	463×404×291.5mm
Package size (L×W×H)	515×460×350mm
Net weight	11.5kg