



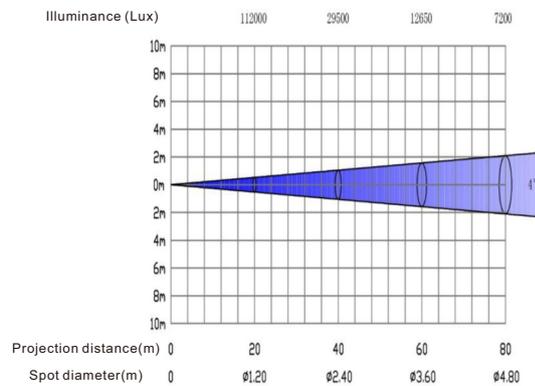

Moving Head Beam Light

TL-LT801

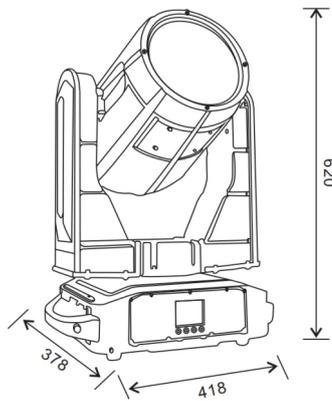

Feature:

- * Optics: high-precision glass optical lens (6-layer coating film)
- * Color panel: 11 color plate + 1 blank, bidirectional rainbow effect, adjustable speed, and arbitrary positioning function
- * Fixed pattern panel: 12 fixed pattern + 1 blank, pattern dithering, one-way flow, adjustable speed, and arbitrary positioning function.
- * Prism: 1 prism panel that supports bidirectional rotation; support 16-sided prism effects, and 8-sided prism effects; 2 prisms can be overlaid.
- * Strobe: double-chip strobe 0.5-20 times/sec, support synchronous, asynchronous, and random stroboscopic modes, and adjustable speed.
- * Atomization: 1 independent atomization effect with soft and natural light spot.
- * Scan range: X-axis 540°/2.5 S, Y-axis 270°/1.5 S, resolution: 8Bit/16Bit.
- * Display interface: widescreen LCD interface in Chinese and English.
- * Motor: the XY axis adopts a three-phase motor, with 16Bit drive.

Specifications:

Model	TL-LT801
Input voltage	AC110V-240V 50/60Hz, 500W
Ballast	Electronic ballast
Light source	OSRAM 371
Average lifespan	2000H
Color temperature	7800K
Beam angle	Parallel light 0-2°, atomizing light 8°
Control mode	DMX512 (ART-NET/RDM/DMX wireless, optional)
Channel	13/16 channels
Fixture material	High temperature resistant plastic + molded alloy material
Protection level	IP55
Fixture size (L×W×H)	440×410×620mm
Package size (L×W×H)	515×485×675mm
Gross weight	29kg
Net weight	25.2kg